)ynma

Electronic press for drawer and door assembly

Electronic press with servo-motor technology specifically designed for integration into industry 4.0. With a capacity of instantaneous adjustment by different systems (using Ethernet communication, reading bar codes, memorization of lists of models, etc...) Its studied design, the electronic system of movement and tighten by servo-motors, together with the use of linear guides, brings a plus of speed and accuracy in the maneuver.

The **BOX MTS** is a high performance press, ideal for production of wide variety of dimensions at high working rates. It is extremely effective with any type of joint (smooth miter, shank, dovetail...) Ensuring a perfect closing and squaring of drawers or frames and minimizing adjustment times.






TECHNICAL FEATURES BOX MTS

PRESS SPECIFICATIONS	
Max. / min. length (X)	1380 / 230 mm
Max. / min. height (Y)	840 / 240 mm
Max. / min. width (Z)	250 / 0 mm
Max. projected end (V)	40 mm
Max. front thickness (T)	35 mm
PRESS STRENGTH	
Max. lateral strength (Fx)	1.200 kg
Max. vertical strength (Fy)	1.200 kg
ELECTRICAL SUPPLY	
Voltage	400v.
Electrical power	3.0 kW.
PNEUMATIC SUPPLY (OPTIONAL KIT 'DOOR')	
Working pressure	4 bar
Air consumption	4 NI / Cycle.
OVERALL DIMENSIONS / WEIGHT	
Length x Height x Width (LxHxW)	2500 x 2000 x 1000 mm
Weight	470 kg



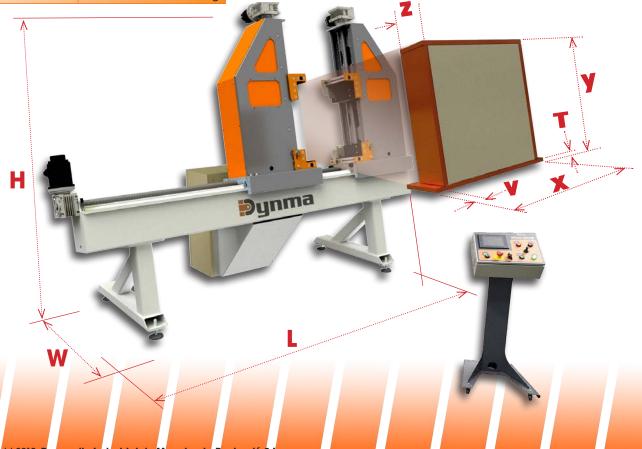

PATENTED MODEL. Copyright 2019. **Desarrollo Industrial de Maquinaria Benicarló S.L.** The information contained in this document is subjected to change and is not binding.

DYNMA is a registered trademark by Desarrallo Industrial de Maquinaria Benicarló S.L.

